

Inquiry  Order

Customer number: \_\_\_\_\_

Company stamp / address:

Contact person: \_\_\_\_\_

Telephone: \_\_\_\_\_

Quotation No.: \_\_\_\_\_

Commission: \_\_\_\_\_

Number of systems: \_\_\_\_\_

Corner angles 90° - 180°: \_\_\_\_\_ pieces

Opening direction:  inwards folding  outwards folding (Note: Use interior view!)


Dimensions: Width: \_\_\_\_\_ (Total unfolding) Height: \_\_\_\_\_ (incl. possible floor recession)

Number of panel \_\_\_\_\_ to the left \_\_\_\_\_ to the right

Colour:  RAL \_\_\_\_\_  E6-EV1  DB703  DB703FS  Special colour: \_\_\_\_\_  
 Pre anodizing

Glazing:  8 mm tempered glass, clear with Heat-Soak-Test  10 mm tempered glass, clear with Heat-Soak-Test  12 mm temp. glass, clear with Heat-Soak-Test  Special glass: \_\_\_\_\_


**Height compensation profile:**

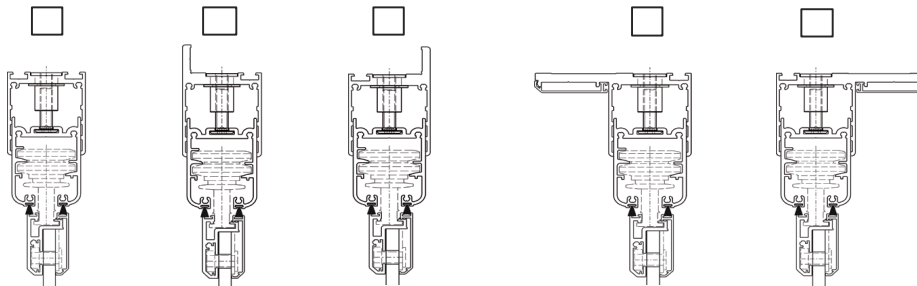

(Indicate height exclusive vertical flange) left = outside / right = inside

Glazing bead 34 mm as frame extension for vertical flange

**Bottom track:**

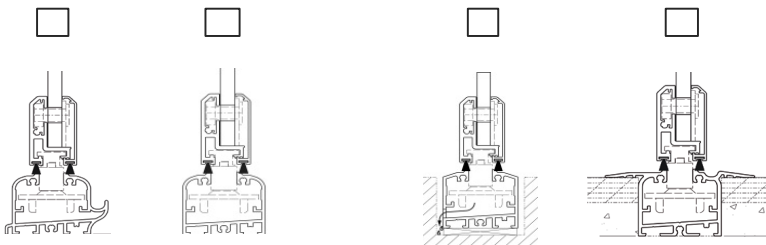

EV1 (standard)  
 RAL \_\_\_\_\_

(Indicate height inclusive floor recession)

Rail extension:  right length L \_\_\_\_\_ mm  left length L \_\_\_\_\_ mm

## Operation/Handle:



- Turning knob (Standard)       Door fitting  
 inside     inside and outside     with PZ     without PZ  
(not possible with side aluminium panel profile)

Handle height: H = \_\_\_\_\_ (Indicate handle height from lower panel edge)     Special color \_\_\_\_\_




- with half profile cylinder  
 with PZ inside + outside



- with half profile cylinder  
 with PZ inside + outside

- Flush handle with shoot-bolt lock       Side locking with flat handle\*  
 Flush handle with shoot-bolt lock inside + outside       Side locking with flat handle inside + outside\*

-  with plastic knob on the turning panel


\* only in combination with vertical frame

Lever lock:  yes


Storm lock:  yes

## Wall connection left and right:


- with rubber gasket  
(not possible with lateral aluminium profile)




- with brush gasket  
(not possible with lateral aluminium profile)




- lateral wall connection



- without wall connection,  
 glass non flush  
(not possible with lateral aluminium profile)



- without wall connection,  
 flush glass  
(not possible with lateral aluminium profile)



- in EV1 (Standard)  
 in RAL \_\_\_\_\_

## PVC gap gasket:



- 1 piece per panel joint  
(not possible with lateral aluminium profile)